



Audio System Circuit Diagram

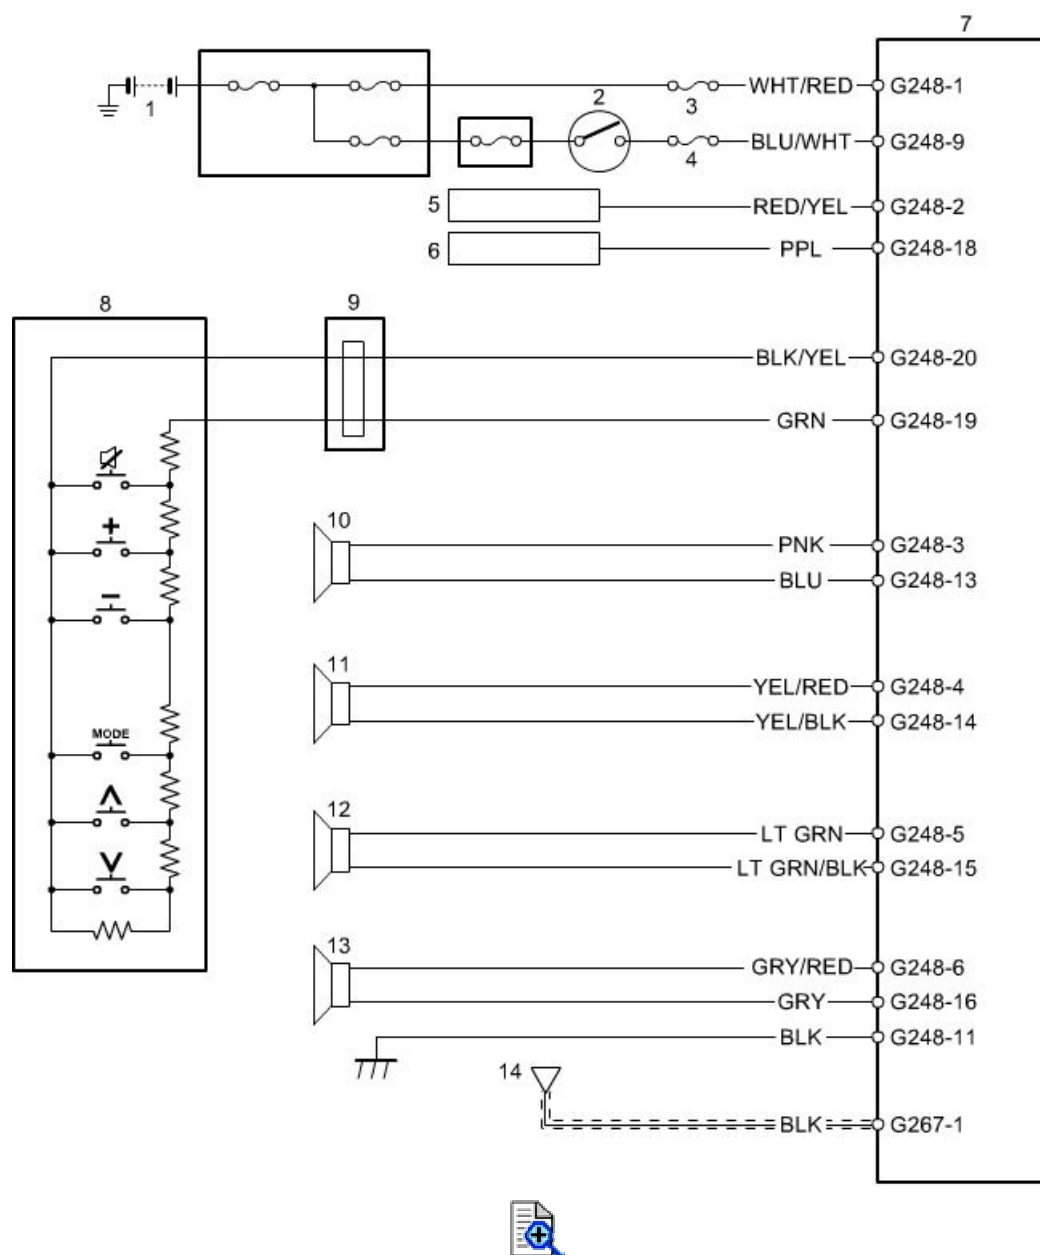

1. Battery	8. Remote audio control switch (if equipped)
2. Ignition switch	9. Contact coil assembly
3. "DOME" fuse	10. Left side front speaker
4. "ACC2" fuse	11. Right side front speaker
5. Lighting switch	12. Left side rear speaker
6. BCM	13. Right side rear speaker
7. Audio unit	14. Radio antenna

Terminal arrangement of audio unit (view: A)

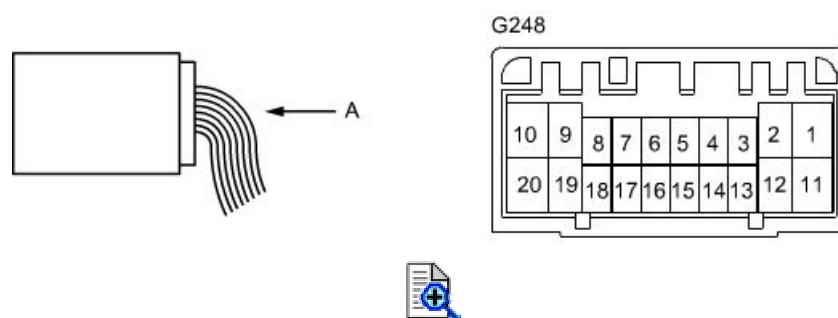

Terminal	Circuit	Terminal	Circuit
G248-1	Back up power source	G248-11	Ground
G248-2	To lighting switch (illumination signal)	G248-12	—
G248-3	Left-front speaker (+)	G248-13	Left-front speaker (-)
G248-4	Right-front speaker (+)	G248-14	Right-front speaker (-)
G248-5	Left-rear speaker (+)	G248-15	Left-rear speaker (-)
G248-6	Right-rear speaker (+)	G248-16	Right-rear speaker (-)
G248-7	—	G248-17	—
G248-8	—	G248-18	To BCM (vehicle speed pulse)
G248-9	Ignition switch	G248-19	Remote audio control switch signal (+)
G248-10	—	G248-20	Remote audio control switch signal (-)