


## ABS Circuit Diagram

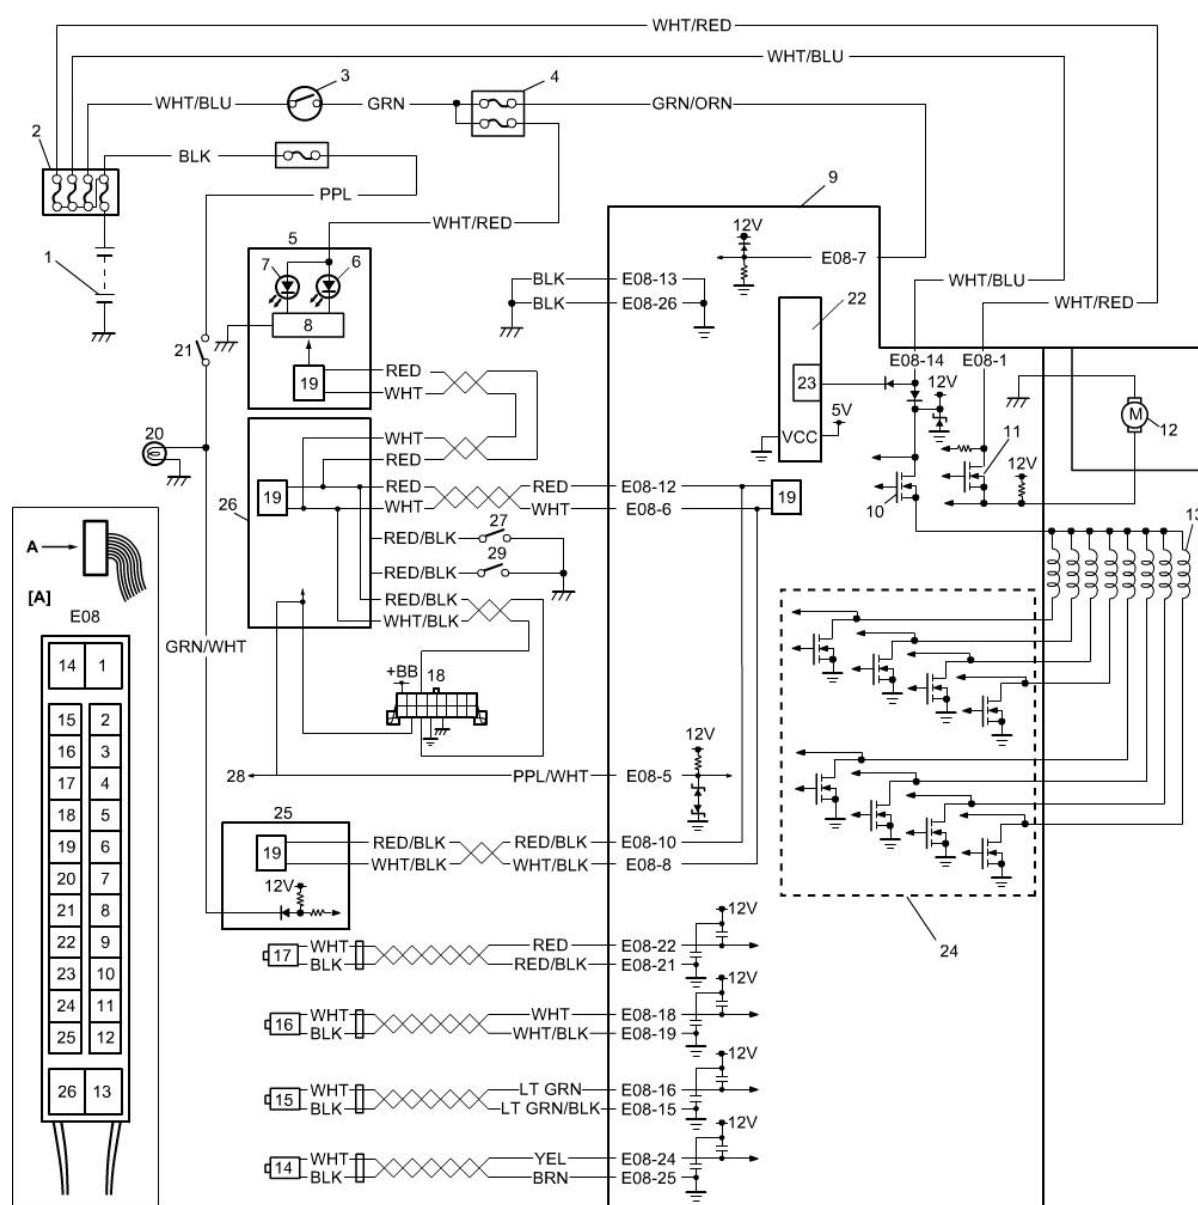

[A]: ABS control module connector (View: A)	10. Solenoid valve power supply driver (transistor)	20. Brake light
1. Battery	11. ABS pump motor driver (transistor)	21. Brake light switch
2. Main fuse box	12. Pump motor	22. Power control unit
3. Ignition switch	13. Solenoid valves	23. Internal memory
4. Junction block assembly	14. Right-rear wheel speed sensor	24. Solenoid valve driver (transistor)
5. Combination meter	15. Left-rear wheel speed sensor	25. ECM
6. ABS warning light	16. Right-front wheel speed sensor	26. BCM

7. EBD warning light (Brake warning light)	17. Left-front wheel speed sensor	27. Brake fluid level switch
8. Light driver module	18. Data link connector	28. P/S control module
9. ABS hydraulic unit / control module assembly	19. CAN driver	29. Parking brake switch

Terminal	Wire color	Circuit
E08	1	WHT/RED
	2	—
	3	—
	4	—
	5	PPL/WHT
	6	WHT
	7	GRN/ORN
	8	WHT/BLK
	9	—
	10	RED/BLK
	11	—
	12	RED
	13	BLK
	14	WHT/BLU
	15	LT GRN/BLK
	16	LT GRN
	17	—
	18	WHT
	19	WHT/BLK
	20	—
	21	RED/BLK
	22	RED
	23	—
	24	YEL
	25	BRN
	26	BLK